



## 1. Tube Packing

### 1.1 Tube Quantity 30 pcs / Tube

### 1.2 Inner Box



### 1.3 Carton

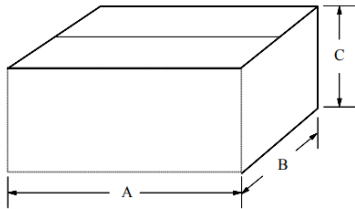


### 1.4 Dimensions (Unit : mm)

	A	B	C
Inner Box	540±5	165±5	50±5
Carton	565±5	285±5	185±5


## 1.5 Package

### 1.ONE ITEM(30pcs)

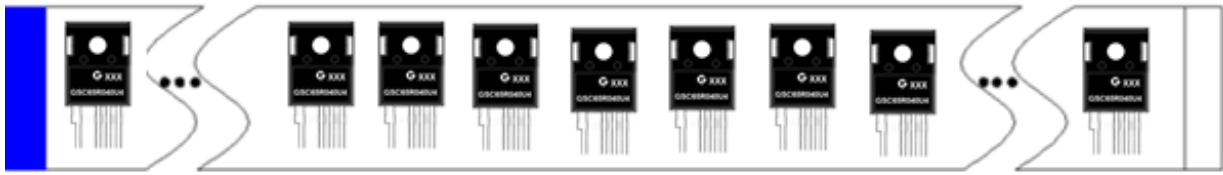

↓  
12Strips

## 2. INNER BOX

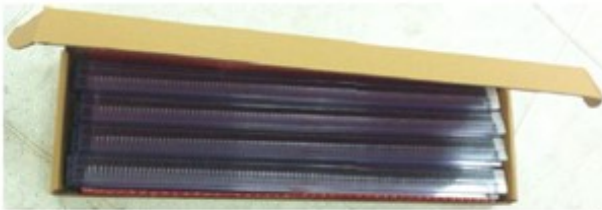

BOX LABEL

100mm

PART NO.: GSC65R040U4  
PKG.: TO-247-4L  
RANGE: PASS  
LOT. NO.: HB1-ZQ230303901

DATE: 2025-07-08  
QTY: 1.8KPCS



HF (Pb)

40mm

银河微电  
Galaxy  
Microelectronics  
Changzhou Galaxy Century Microelectronics Co., Ltd.

## 3. CARTON



Put in carton(5 inner box)



## 2. Marking

Each reel shall be legibly marked with the following items.

PART NO.: GSC65R040U4

DATE: 2025-07-08

PKG.: TO-247-4L

Q'TY: 1.8KPCS

RANGE: PASS




LOT. NO.: HB1-ZQ230303901



Changzhou Galaxy Century Microelectronics Co., Ltd.

## 3. Type

Product code of taping shall be composed as indicated below.

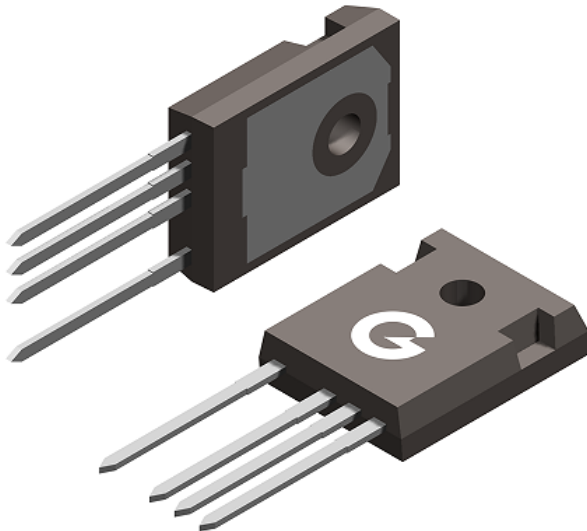

## 4. Recommended storage condition

Storage period

Use the products within 12 months after delivered.

The first reflow soldering should be performed within 168 hours after opening the moisture-proof.

Storage conditions

Products should be stored in the warehouse on the following conditions.

Temperature : 0~ 35° C

Humidity: 30 to 70% relative humidity No rapid change on temperature and humidity

Don't keep products in corrosive gases such as sulfur, chlorine gas or acid, or it may cause oxidization of electrode, resulting in poor solderability.