


Features

- Low power loss by high speed switching and low on-resistance
- Excellent thermal behavior
- Very low FOM for fast switching efficiency
- Product validation acc. JEDEC Standard
- Integrated ESD protection diode: HBM: JESD22-A114-B: 3A

HF




Applications

- LED lighting
- Adapters
- Chargers
- Industrial power
- PFC stage

Mechanical Data

- Case: TO-220AB, TO-263, ITO-220AB
- Molding Compound: UL Flammability Classification Rating 94V-0
- Terminals: Matte tin-plated leads; solderability-per MIL-STD-202, Method 208

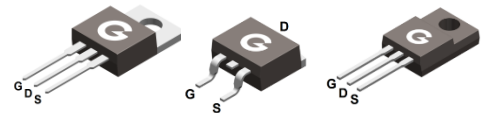

TO-220AB

TO-263

ITO-220AB

Ordering Information

Part Number	Package	Shipping Quantity	Marking Code
SJM80R280	TO-220AB	50 pcs / Tube	SJM80R280
SJM80R280B	TO-263	50 pcs / Tube or 800 pcs / Tape & Reel	SJM80R280B
SJM80R280F	ITO-220AB	50 pcs / Tube	SJM80R280F

Maximum Ratings (@ $T_C = 25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Value	Unit
Drain-to-Source Voltage	V_{DSS}	800	V
Gate-to-Source Voltage (Static)	V_{GSS}	± 20	V
Continuous Drain Current ($T_C = 25^\circ\text{C}$)	I_D	17	A
Continuous Drain Current ($T_C = 100^\circ\text{C}$)		10.7	A
Pulsed Drain Current ($t_p = 10\mu\text{s}$, $T_C = 25^\circ\text{C}$)	I_{DM}	68	A
Single Pulse Avalanche Energy ^{*2}	E_{AS}	500	mJ
Power Dissipation (TO-220AB, $T_C = 25^\circ\text{C}$)	P_D	180	W
Power Dissipation (TO-263, $T_C = 25^\circ\text{C}$)		180	W
Power Dissipation (ITO-220AB, $T_C = 25^\circ\text{C}$)		34	W
Operating Junction Temperature Range	T_J	-55 ~ +150	$^\circ\text{C}$
Storage Temperature Range	T_{STG}	-55 ~ +150	$^\circ\text{C}$

Thermal Characteristics

Parameter	Symbol	Min.	Typ.	Max.	Unit
Thermal Resistance Junction-to-Case (TO-220AB, TO-263)	R _{θJC}	-	0.6	0.7	°C/W
Thermal Resistance Junction-to-Case (ITO-220AB)		-	2.9	3.7	°C/W
Thermal Resistance Junction-to-Air (TO-220AB, TO-263)	R _{θJA}	-	-	62	°C/W
Thermal Resistance Junction-to-Air (ITO-220AB)		-	-	75	°C/W

Electrical Characteristics (@ T_A = 25°C unless otherwise specified)

Symbol	Parameter	Test Condition	Min.	Typ.	Max.	Unit
Static Characteristics						
V _{DSS}	Drain-Source Breakdown Voltage	V _{GS} = 0V, I _D = 250μA	800	-	-	V
I _{DSS}	Zero Gate Voltage Drain Current	V _{DS} = 800V, V _{GS} = 0V	-	-	1	μA
I _{GSS}	Gate-Body Leakage Current	V _{GS} = ±20V, V _{DS} = 0V	-	-	±1	μA
On Characteristics						
R _{DS(ON)}	Drain-Source On-resistance *1	V _{GS} = 10V, I _D = 5A	-	0.22	0.28	Ω
V _{GS(th)}	Gate Threshold Voltage	V _{DS} = V _{GS} , I _D = 250μA	2	3	5	V
R _G	Gate Resistance	V _{GS} = 0V, f = 1MHz	-	2.6	-	Ω
Dynamic Characteristics						
C _{ISS}	Input Capacitance	V _{GS} = 0V V _{DS} = 40V f = 250kHz	-	1959	-	pF
C _{OSS}	Output Capacitance		-	99	-	
C _{RSS}	Reverse Transfer Capacitance		-	3	-	
Switching Characteristics						
t _{d(ON)}	Turn-on Delay Time *3	V _{DD} = 400V V _{GS} = 10V I _D = 9.6A R _G = 25Ω	-	41	-	ns
t _r	Turn-on Rise Time *3		-	24	-	
t _{d(OFF)}	Turn-Off Delay Time *3		-	179	-	
t _f	Turn-Off Fall Time *3		-	17	-	
Q _G	Total Gate-Charge	V _{DD} = 640V V _{GS} = 10V I _D = 9A	-	47	-	nC
Q _{GS}	Gate to Source Charge		-	7	-	
Q _{GD}	Gate to Drain (Miller) Charge		-	17.3	-	
Source-Drain Diode Characteristics						
V _{SD}	Diode Forward Voltage *1	I _{SD} = 9A, V _{GS} = 0V	-	0.8	1.2	V
t _{rr}	Reverse Recovery Time	I _F = 5A, V _R = 400V	-	315	-	ns
Q _{rr}	Reverse Recovery Charge	di/dt = 100A/μs	-	3.8	-	μC

Notes:

- The data tested by pulsed, pulse width ≤ 300μs, duty cycle ≤ 2%
- The E_{AS} data shows Max. rating. The test condition is V_{DD} = 100V, V_{GS} = 10V, L = 50mH
- Guaranteed by design, not subject to production

Ratings and Characteristics Curves (@ $T_A = 25^\circ\text{C}$ unless otherwise specified)

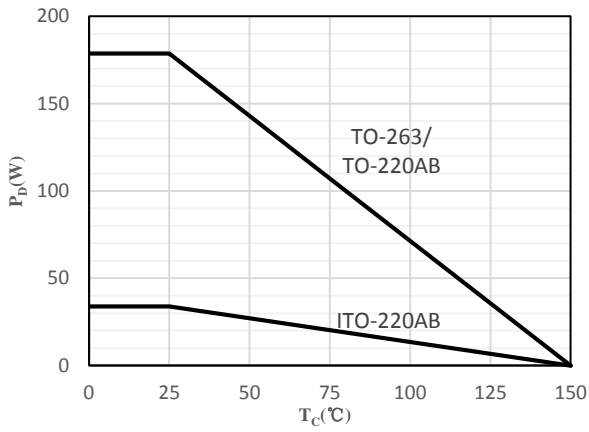


Fig 1 Power Dissipation

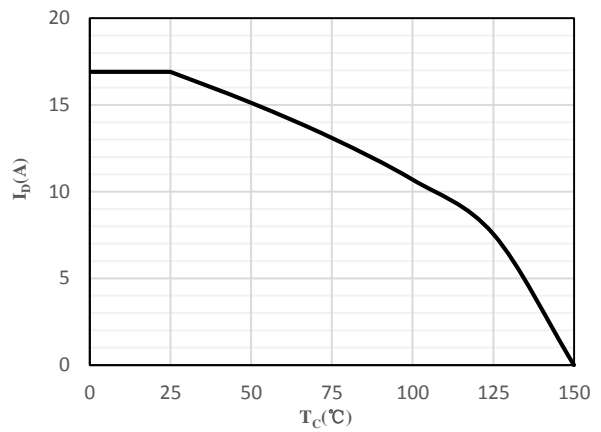


Fig 2 Drain Current

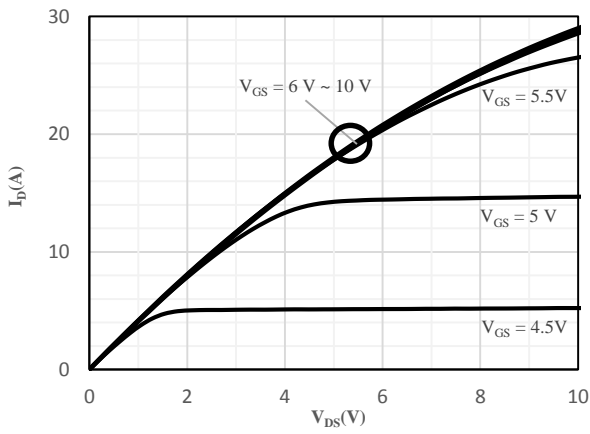


Fig 3 Typical Output Characteristics

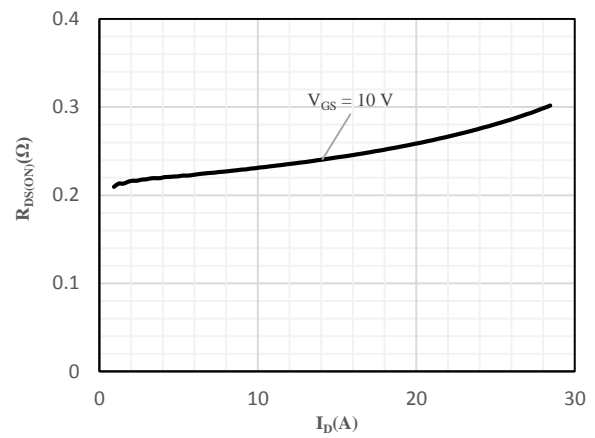


Fig 4 On-Resistance vs. Drain Current and Gate Voltage

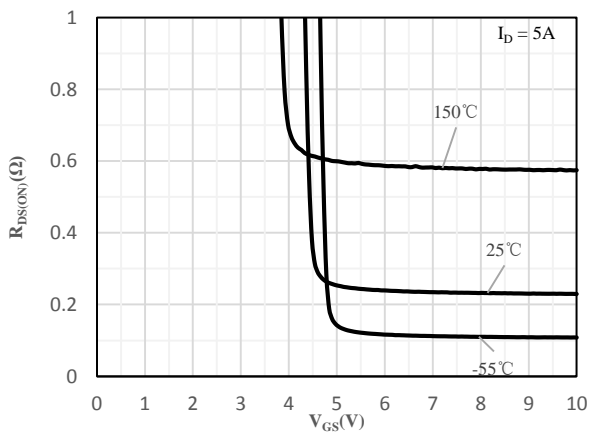


Fig 5 On-Resistance vs. Gate-Source Voltage

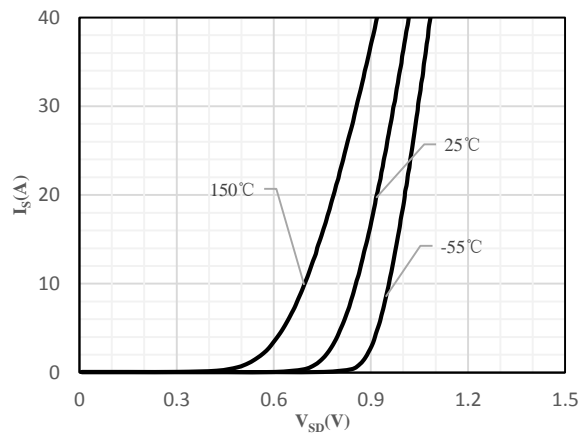


Fig 6 Body-Diode Characteristics

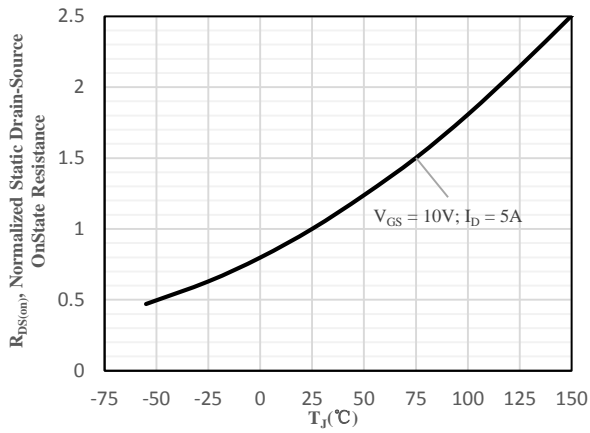


Fig 7 Normalized On-Resistance vs. Junction Temperature

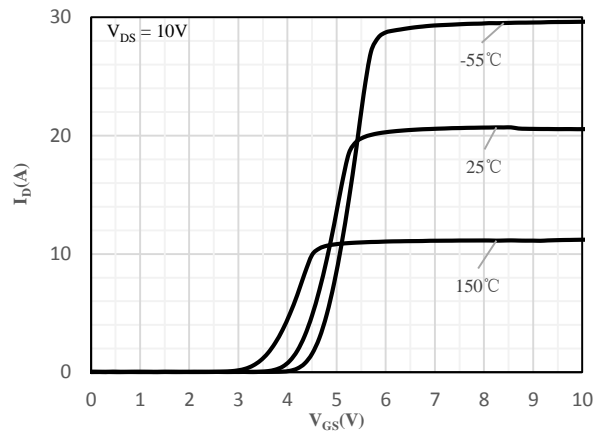


Fig 8 Transfer Characteristics

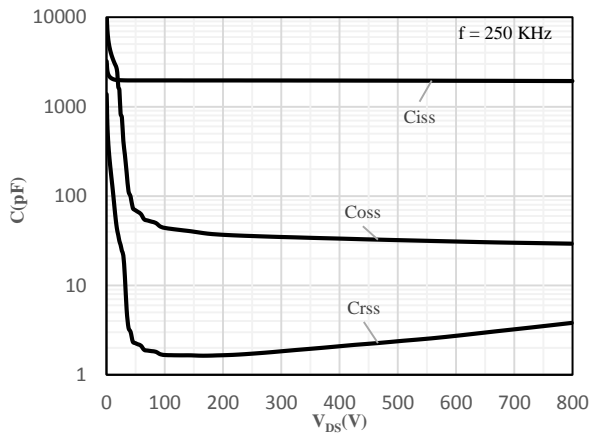


Fig 9 Capacitance Characteristics

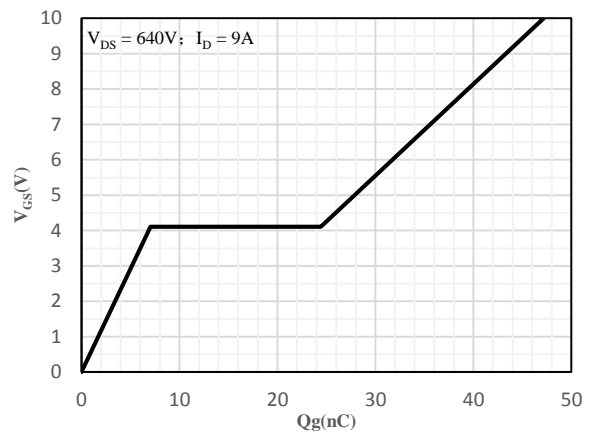


Fig 10 Gate-Charge Characteristics

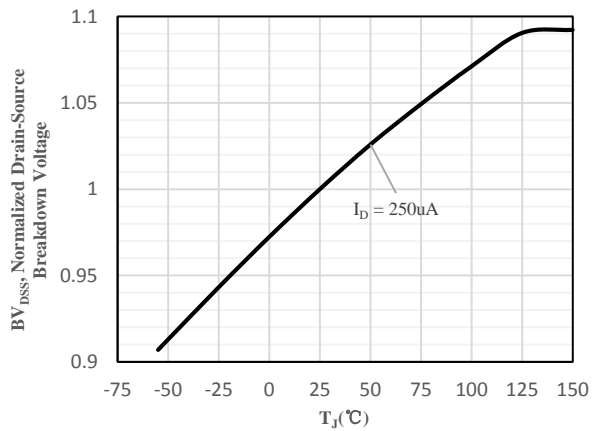


Fig 11 Normalized Breakdown Voltage vs. Junction Temperature

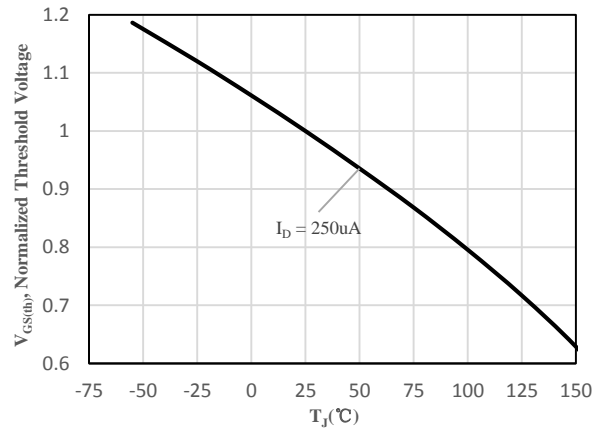


Fig 12 Normalized $V_{GS(th)}$ vs. Junction Temperature

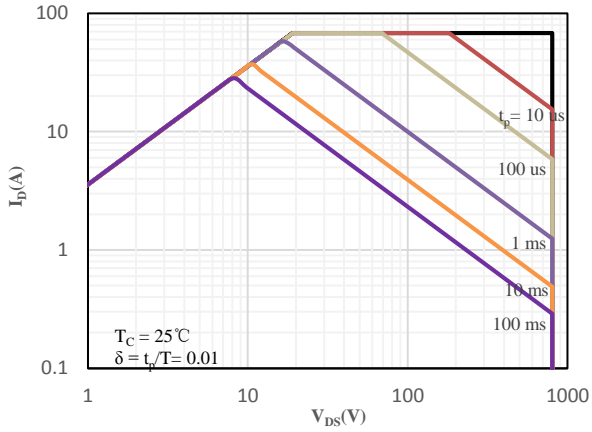


Fig 13 Safe Operation Area (TO-220AB / TO-263)

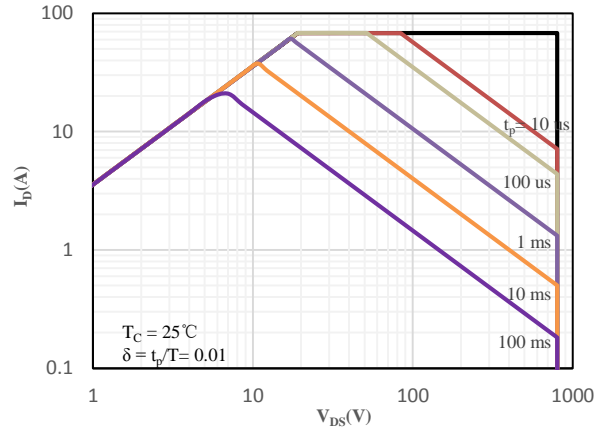


Fig 14 Safe Operation Area (ITO-220AB)

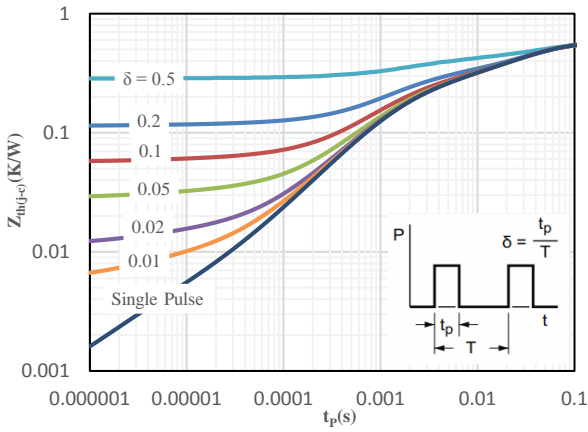


Fig 15 Maximum transient thermal impedance
(TO-220AB / TO-263)


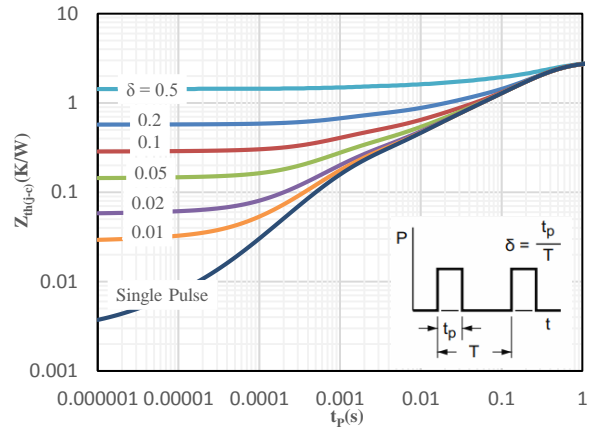


Fig 16 Maximum transient thermal impedance
(ITO-220AB)

Package Outline Dimensions (Unit: mm)

TO-220AB	
Dimension	Min. / Max.
A	9.80 / 10.30
B	8.70 / 9.10
C	4.37 / 4.77
D	1.07 / 1.47
E	2.64 / 2.84
F	13.14 / 13.74
G	2.44 / 2.64
H	28.03 / 28.83
I	3.50 / 4.00
J	0.28 / 0.48
K	1.22 / 1.32
L	0.71 / 0.91
M	2.40 / 2.60
N	3.76 / 3.96

ITO-220AB	
Dimension	Min. / Max.
A	9.90 / 10.30
B	14.80 / 15.20
C	4.30 / 4.70
D	2.50 / 2.90
E	2.80 / 3.30
F	13.00 / 13.60
G	3.10 / 3.30
H	28.00 / 28.60
I	7.90 / 8.90
J	0.40 / 0.60
L	0.70 / 0.90
M	1.30 / 1.50
N	2.60 / 2.80
O	2.60 / 3.10
P	2.45 / 2.65
K/R	1.10 / 1.30

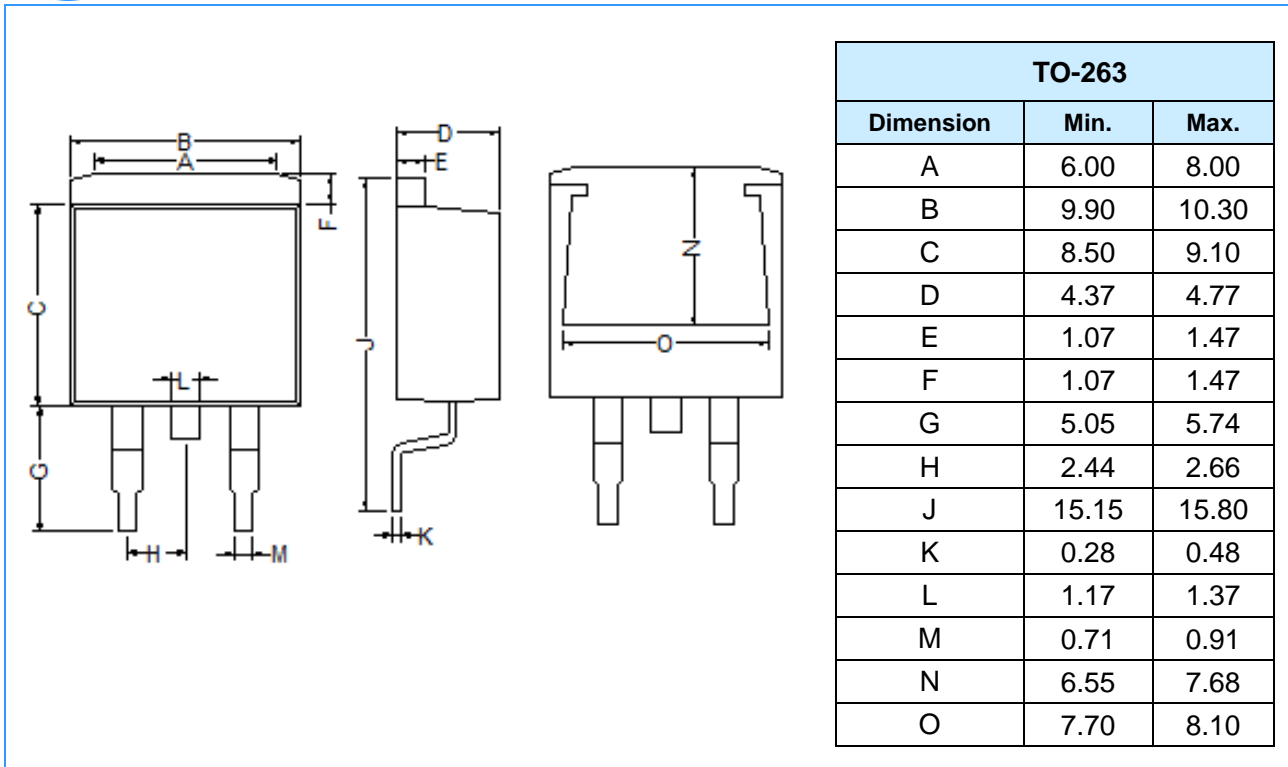

Mounting Pad Layout (Unit: mm)

