



### Features

- High current gain
- Excellent  $h_{FE}$  linearity
- Low noise between 30Hz and 15kHz

HF



SOT-523

### Mechanical Data

- Case: SOT-523
- Molding compound: UL flammability classification rating 94V-0
- Terminal s: Tin-plated; solderability per MIL-STD-202, Method 208

### Ordering Information

Part Number	Package	Shipping Quantity	Marking Code
BC846A/B/T	SOT-523	3000 pcs / Tape & Reel	1A/1B
BC847A/B/CT	SOT-523	3000 pcs / Tape & Reel	1E/1F/1G
BC848A/B/C/T	SOT-523	3000 pcs / Tape & Reel	1J/1K/1L

### Maximum Ratings (@ $T_A = 25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	BC846	BC847	BC848	Unit
Collector-Base Voltage	$V_{CBO}$	80	50	30	V
Collector-Emitter Voltage	$V_{CEO}$	65	45	30	V
Emitter-Base Voltage	$V_{EBO}$	6	6	5	V
Collector Current (Continuous)	$I_C$	100			mA
Collector Current (Peak)	$I_{CM}$	200			mA

### Thermal Characteristics

Parameter	Symbol	Value	Unit
Power Dissipation (Collector) <sup>(Note 1)</sup>	$P_D$	265	mW
Thermal Resistance Junction-to-Air <sup>**1</sup>	$R_{\theta JA}$	306	$^\circ\text{C}/\text{W}$
Thermal Resistance Junction-to-Case <sup>**1</sup>	$R_{\theta JC}$	152	$^\circ\text{C}/\text{W}$
Thermal Resistance Junction-to-Lead <sup>**1</sup>	$R_{\theta JL}$	61	$^\circ\text{C}/\text{W}$
Operating Junction Temperature	$T_J$	-55 ~ +150	$^\circ\text{C}$
Storage Temperature Range	$T_{STG}$	-55 ~ +150	$^\circ\text{C}$

### Electrical Characteristics (@ $T_A = 25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Collector-Base Breakdown Voltage BC846	$V_{(BR)CBO}$	$I_C = 10\mu\text{A}, I_E = 0$	80	-	-	V
Collector-Base Breakdown Voltage BC847			50	-	-	
Collector-Base Breakdown Voltage BC848			30	-	-	
Collector-Emitter Breakdown Voltage BC846	$V_{(BR)CEO}$	$I_C = 10\text{mA}, I_B = 0$	65	-	-	V
Collector-Emitter Breakdown Voltage BC847			45	-	-	V
Collector-Emitter Breakdown Voltage BC848			30	-	-	V
Emitter-Base Breakdown Voltage BC846	$V_{(BR)EBO}$	$I_E = 10\mu\text{A}, I_C = 0$	6	-	-	V
Emitter-Base Breakdown Voltage BC847			6	-	-	V
Emitter-Base Breakdown Voltage BC848			5	-	-	V
Collector Cut-off Current	$I_{CBO}$	$V_{CB} = 30\text{V}, I_E = 0$	-	-	15	nA
		$V_{CB} = 30\text{V}, I_E = 0$ $T_J = 150^\circ\text{C}$	-	-	5	$\mu\text{A}$
Emitter-base Cut-off Current	$I_{EBO}$	$V_{EB} = 5\text{V}, I_C = 0$	-	-	100	nA
Collector-emitter Cut-off Current	$I_{CEO}$	$V_{CE} = 30\text{V}, I_B = 0$	-	-	1	mA
DC Current Gain BC846/847/848AT	$h_{FE}$	$V_{CE} = 5\text{V}, I_C = 10\mu\text{A}$	-	110	-	-
DC Current Gain BC846/847/848BT			-	250	-	-
DC Current Gain BC847/848CT			-	480	-	-
DC Current Gain BC846/847/848AT		$V_{CE} = 5\text{V}, I_C = 2\text{mA}$	110	-	220	-
DC Current Gain BC846/847/848BT			200	-	450	-
DC Current Gain BC847/848CT			420	-	800	-
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C = 10\text{mA}, I_B = 0.5\text{mA}$	-	0.09	0.25	V
		$I_C = 100\text{mA}, I_B = 5\text{mA}$	-	0.20	0.60	V
Base-Emitter Saturation Voltage	$V_{BE(sat)}$	$I_C = 10\text{mA}, I_B = 0.5\text{mA}$	-	0.70	0.90	V
		$I_C = 100\text{mA}, I_B = 5\text{mA}$	-	0.90	1.10	V
Base-Emitter Voltage	$V_{BE(ON)}$	$V_{CE} = 5\text{V}, I_C = 2\text{mA}$	0.58	0.66	0.70	V
		$V_{CE} = 5\text{V}, I_C = 10\text{mA}$	-	-	0.77	V
Transition Frequency	$f_T$	$V_{CE} = 5\text{V}, I_C = 10\text{mA}$ $f = 100\text{MHz}$	100	-	-	MHz

Note 1: The data tested by surface mounted on a 15mm \* 15mm \* 1mm FR4-epoxy P.C.B

Ratings and Characteristic Curves-BC846/847/848AT (@  $T_A = 25^\circ\text{C}$  unless otherwise specified)

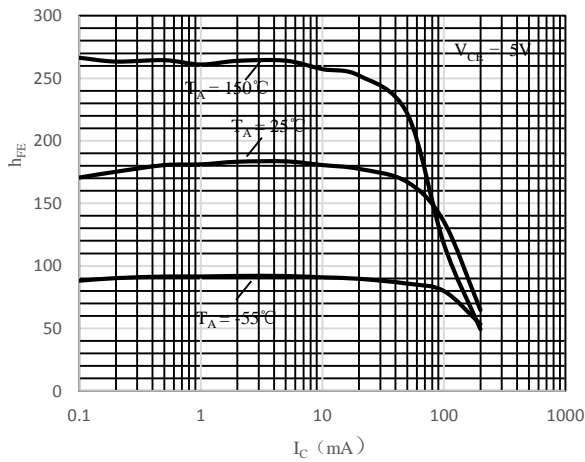


Fig 1  $h_{FE}$  vs.  $I_C$

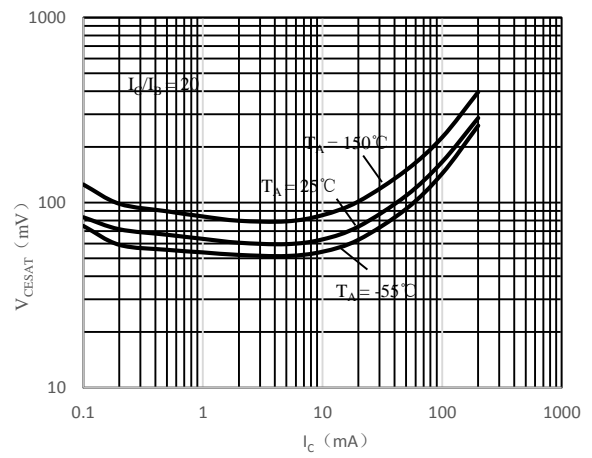


Fig 2  $V_{CE(sat)}$  vs.  $I_C$

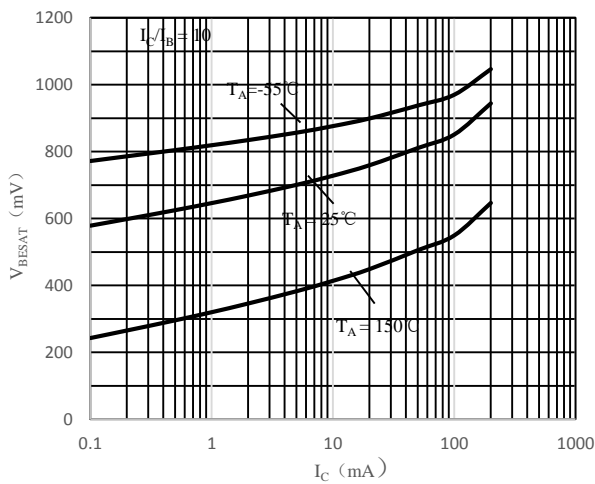


Fig 3  $V_{BE(sat)}$  vs.  $I_C$

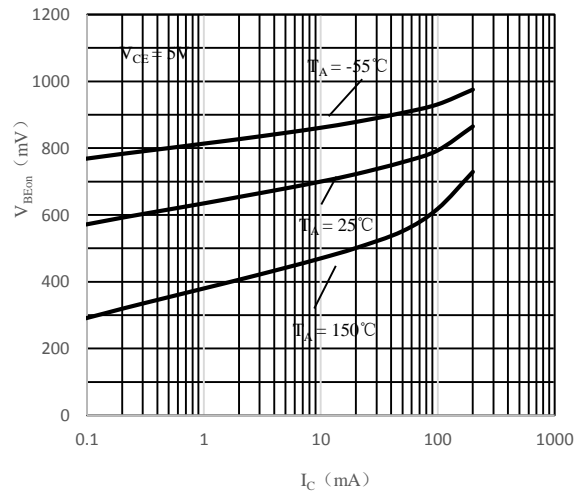


Fig 4  $V_{BE(on)}$  vs.  $I_C$

Ratings and Characteristic Curves-BC846/847/848BT (@  $T_A = 25^\circ\text{C}$  unless otherwise specified)

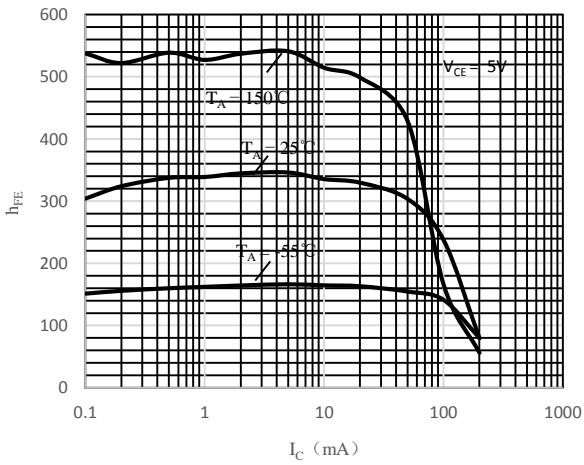


Fig 1  $h_{FE}$  vs.  $I_C$

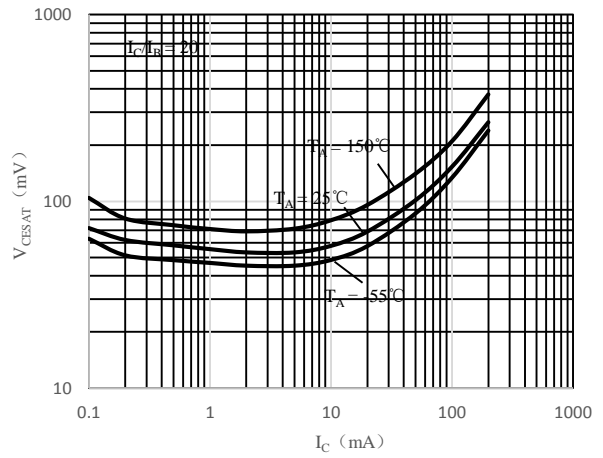


Fig 2  $V_{CE(sat)}$  vs.  $I_C$

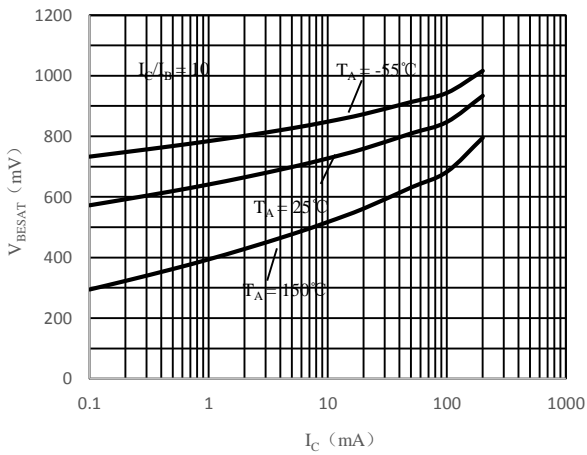


Fig 3  $V_{BE(sat)}$  vs.  $I_C$

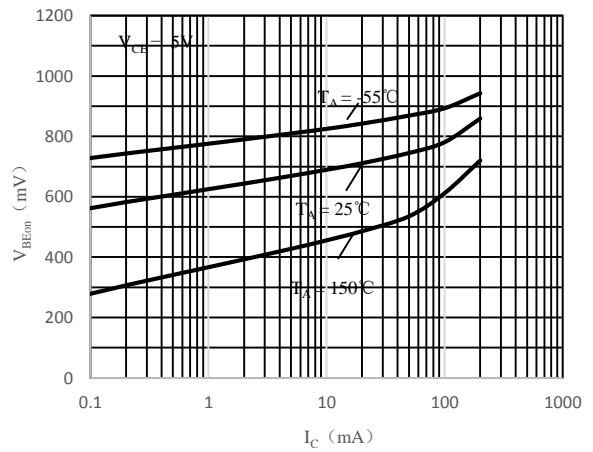


Fig 4  $V_{BE(ON)}$  vs.  $I_C$

Ratings and Characteristic Curves-BC847/848CT (@  $T_A = 25^\circ\text{C}$  unless otherwise specified)

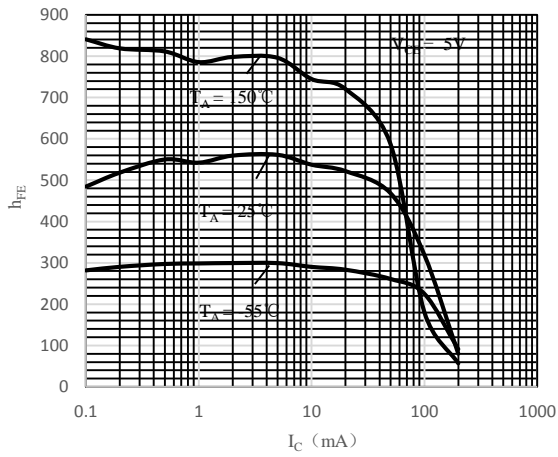


Fig 1  $h_{FE}$  vs.  $I_C$

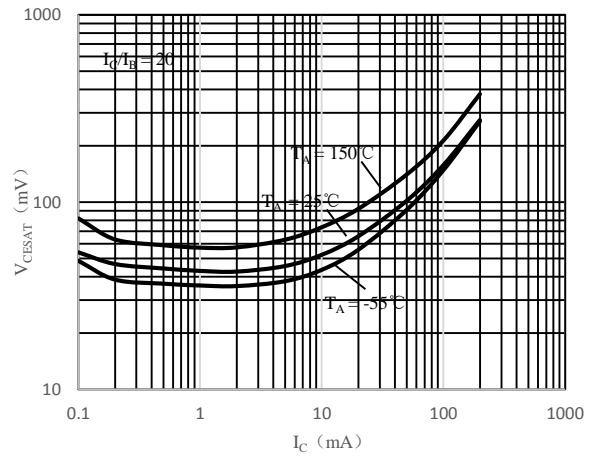


Fig 2  $V_{CE(sat)}$  vs.  $I_C$

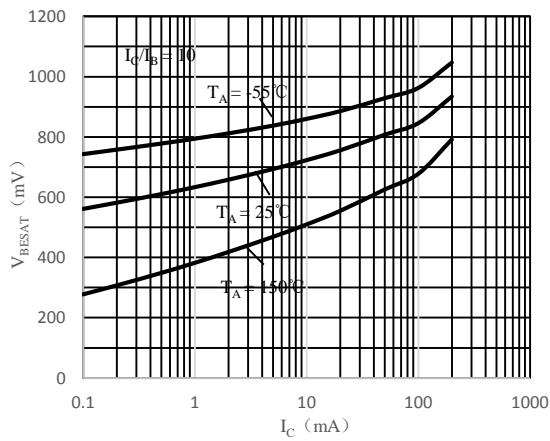


Fig 3  $V_{BE(sat)}$  vs.  $I_C$



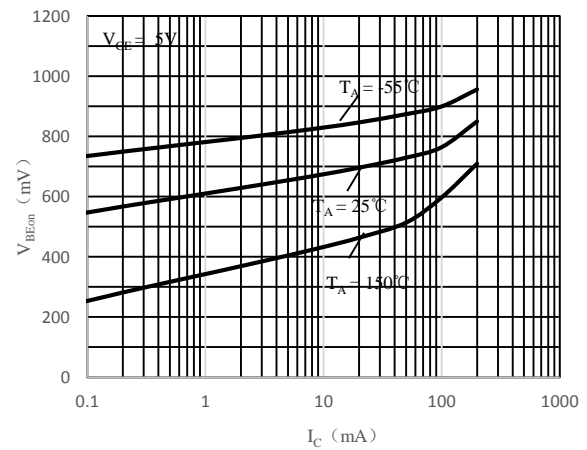


Fig 4  $V_{BE(on)}$  vs.  $I_C$

**Package Outline Dimensions** (Unit: mm)

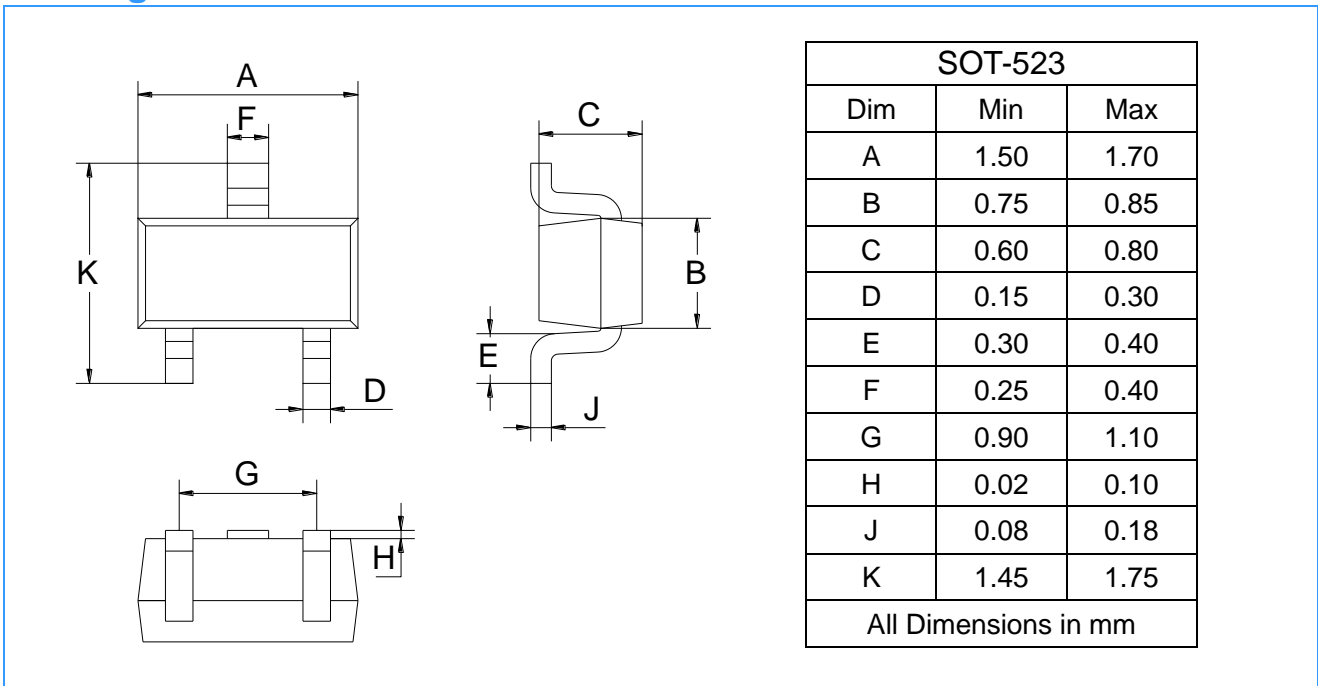

**Package Outline Dimensions** (Unit: mm)

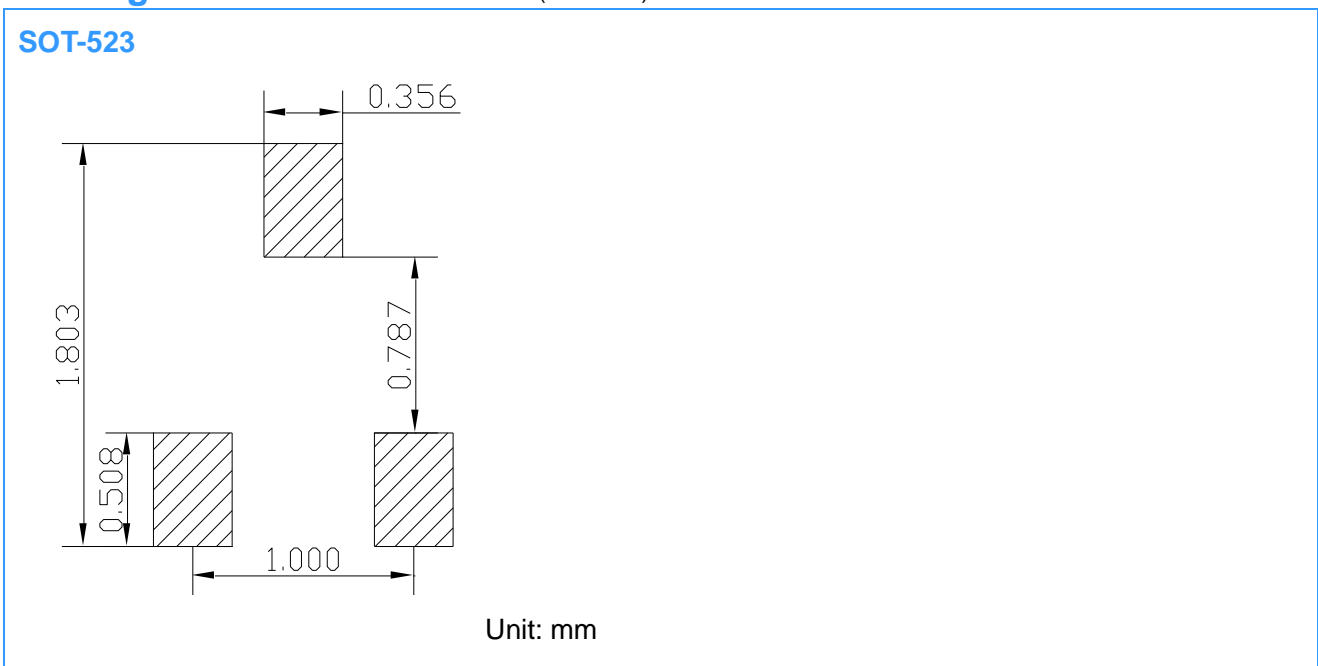

**IMPORTANT NOTICE**

Changzhou Galaxy Century Microelectronics (GME) reserves the right to make changes without further notice to any product information (copyrighted) herein to make corrections, modifications, improvements, or other changes. GME does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others.