


Features

- Low $R_{DS(ON)}$
- Fast switching
- Low gate charge
- Low Reverse transfer capacitances

HF

Mechanical Data

- Case: TO-220AB, TO-263, ITO-220AB
- Molding Compound: UL Flammability Classification Rating 94V-0
- Terminals: Matted-Tin plated; Solderable Per MIL-STD-202, Method 208

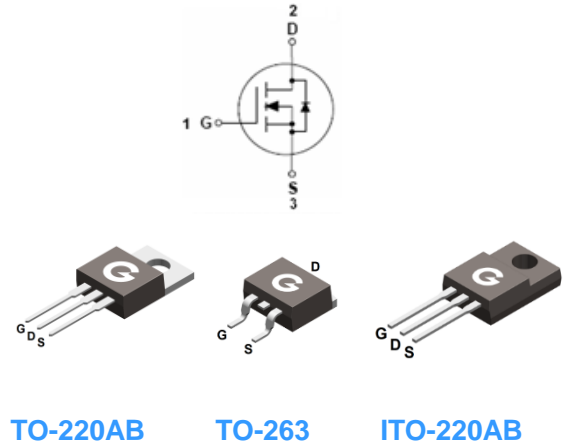

Ordering Information

Part Number	Package	Shipping Quantity	Marking Code
BL6N70	TO-220AB	50 pcs / Tube	6N70
BL6N70B	TO-263	50 pcs / Tube or 800 pcs / Tape & Reel	6N70B
BL6N70F	ITO-220AB	50 pcs / Tube	6N70F

Maximum Ratings (@ $T_C = 25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Value	Unit
Drain-to-Source Voltage	V_{DSS}	700	V
Gate-to-Source Voltage	V_{GSS}	± 30	V
Continuous Drain Current ($T_C = 25^\circ\text{C}$)	I_D	6	A
Continuous Drain Current ($T_C = 100^\circ\text{C}$)		3.8	A
Pulsed Drain Current ($t_p = 10\mu\text{s}$, $T_C = 25^\circ\text{C}$)	I_{DM}	24	A
Single Pulse Avalanche Energy ²	E_{AS}	150	mJ
Power Dissipation (TO-220AB, $T_C = 25^\circ\text{C}$)	P_D	100	W
Power Dissipation (TO-263, $T_C = 25^\circ\text{C}$)		100	W
Power Dissipation (ITO-220AB, $T_C = 25^\circ\text{C}$)		35	W
Operating Junction Temperature Range	T_J	-55 ~ +150	$^\circ\text{C}$
Storage Temperature Range	T_{STG}	-55 ~ +150	$^\circ\text{C}$

Thermal Characteristics

Parameter	Symbol	TO-220AB/TO-263	ITO-220AB	Unit
Thermal Resistance Junction-to-Case	$R_{\theta JC}$	1.25	3.6	$^\circ\text{C/W}$
Thermal Resistance Junction-to-Air	$R_{\theta JA}$	50	62.5	$^\circ\text{C/W}$

Electrical Characteristics (@ $T_A = 25^\circ\text{C}$ unless otherwise specified)

Symbol	Parameter	Test Condition	Min.	Typ.	Max.	Unit
Static Characteristics						
V_{DSS}	Drain-Source Breakdown Voltage	$V_{GS} = 0V, I_D = 250\mu A$	700	-	-	V
I_{DSS}	Zero Gate Voltage Drain Current	$V_{DS} = 700V, V_{GS} = 0V$	-	-	10	μA
I_{GSS}	Gate-Body Leakage Current	$V_{GS} = \pm 30V, V_{DS} = 0V$	-	-	± 100	nA
On Characteristics						
$R_{DS(ON)}$	Drain-Source On-resistance *1	$V_{GS} = 10V, I_D = 3A$	-	-	1.8	Ω
$V_{GS(th)}$	Gate Threshold Voltage	$V_{DS} = V_{GS}, I_D = 250\mu A$	2	-	4	V
Dynamic Characteristics						
C_{ISS}	Input Capacitance	$V_{GS} = 0V$	-	1102	-	pF
C_{OSS}	Output Capacitance	$V_{DS} = 25V$	-	88	-	
C_{RSS}	Reverse Transfer Capacitance	$f = 1MHz$	-	4.5	-	
Switching Characteristics						
$t_{d(ON)}$	Turn-on Delay Time *3	$V_{DD} = 350V$ $I_D = 6A$ $R_G = 10\Omega$	-	19	-	ns
t_r	Turn-on Rise Time *3		-	16	-	
$t_{d(OFF)}$	Turn-Off Delay Time *3		-	39	-	
t_f	Turn-Off Fall Time *3		-	11	-	
Q_G	Total Gate-Charge	$V_{DD} = 560V$	-	26	-	nC
Q_{GS}	Gate to Source Charge	$V_{GS} = 10V$	-	5.2	-	
Q_{GD}	Gate to Drain (Miller) Charge	$I_D = 6A$	-	12	-	
Source-Drain Diode Characteristics						
V_{SD}	Diode Forward Voltage *1	$I_{SD} = 6A, V_{GS} = 0V$	-	-	1.5	V
t_{rr}	Reverse Recovery Time	$I_{SD} = 6A, V_{GS} = 0V$	-	450	-	ns
Q_{rr}	Reverse Recovery Charge	$di/dt = 100A/\mu s$	-	2.46	-	μC

Notes:

1. The data tested by pulsed, pulse width $\leq 300\mu s$, duty cycle $\leq 2\%$
2. The E_{AS} data shows Max. rating. The test condition is $V_{DD} = 100V, V_{GS} = 15V, L = 50mH$
3. Guaranteed by design, not subject to production

Ratings and Characteristics Curves (@ $T_A = 25^\circ\text{C}$ unless otherwise specified)

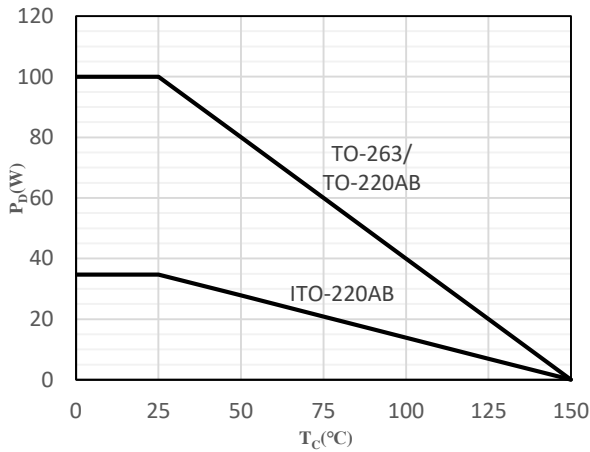


Fig 1 Power Dissipation

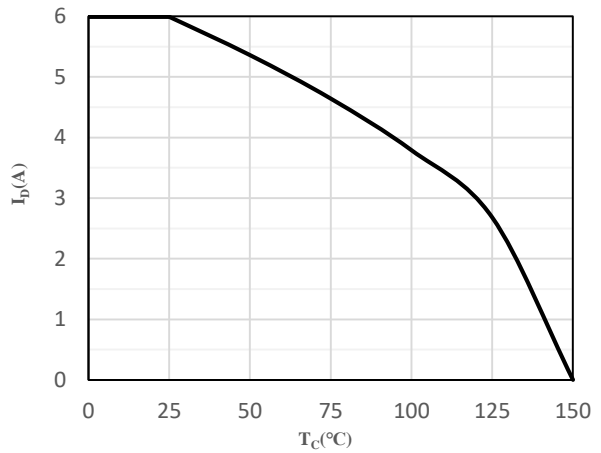


Fig 2 Drain Current

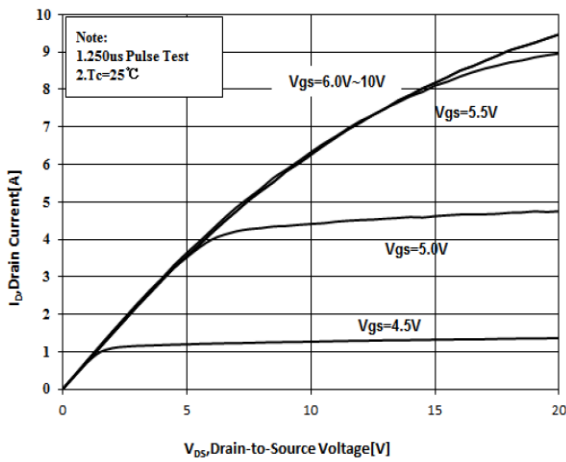


Fig 3 Typical Output Characteristics

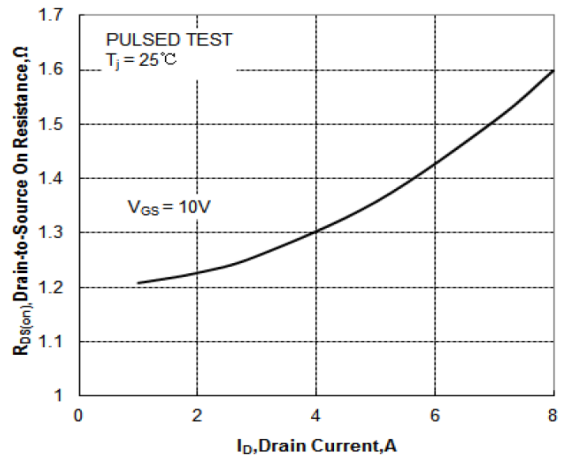


Fig 4 On-Resistance vs. Drain Current and Gate Voltage

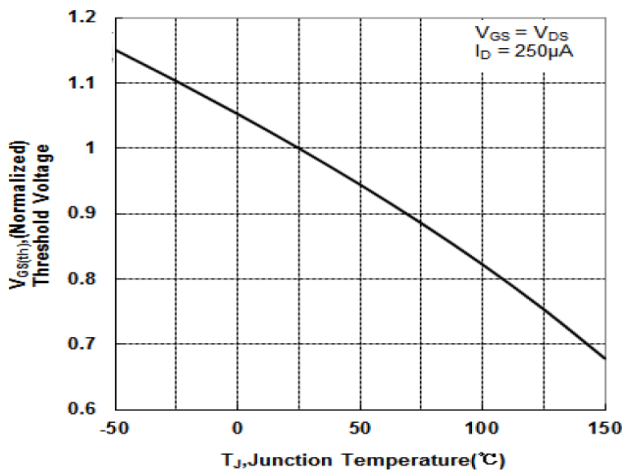


Fig 5 Normalized $V_{GS(th)}$ vs. Junction Temperature









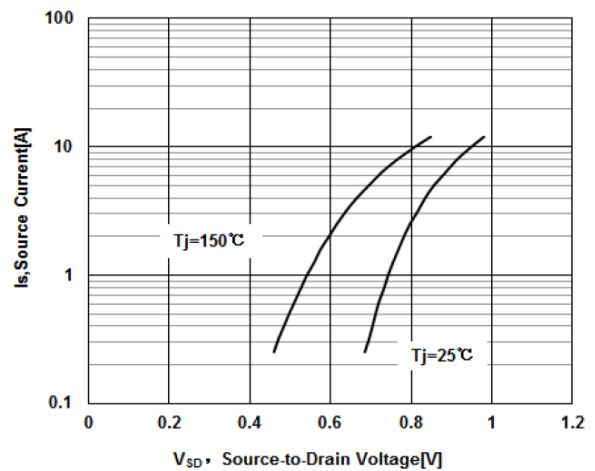


Fig 6 Body-Diode Characteristics

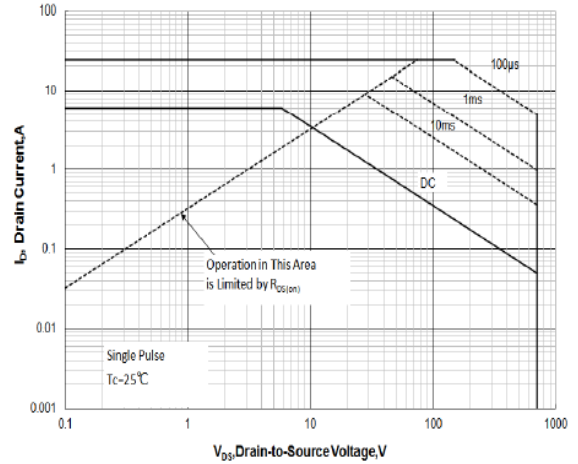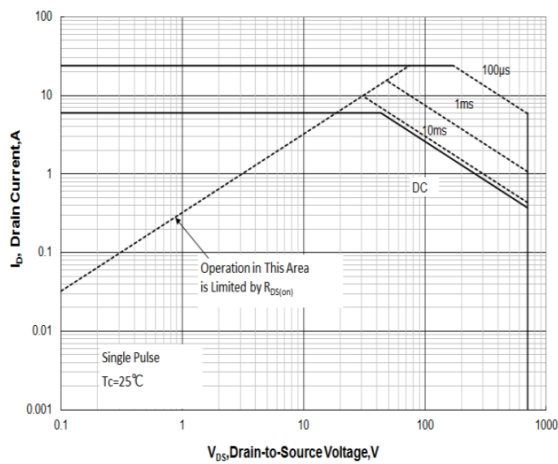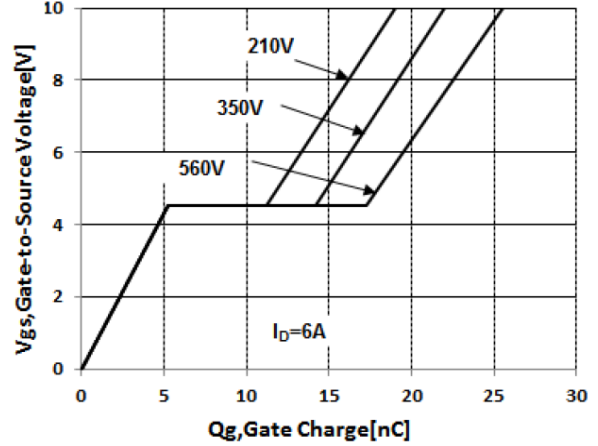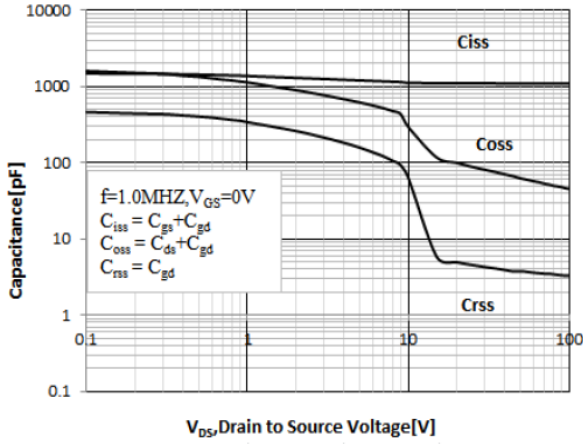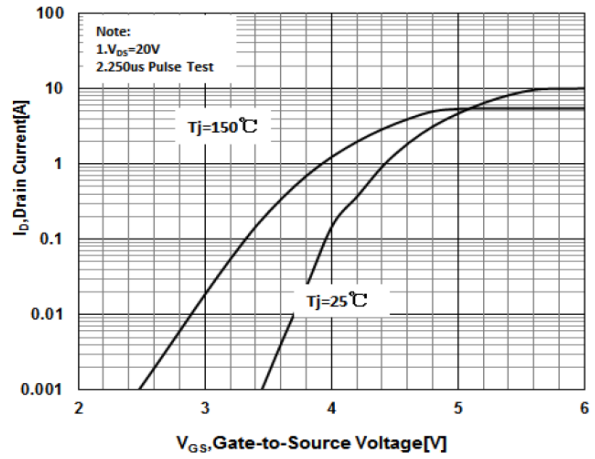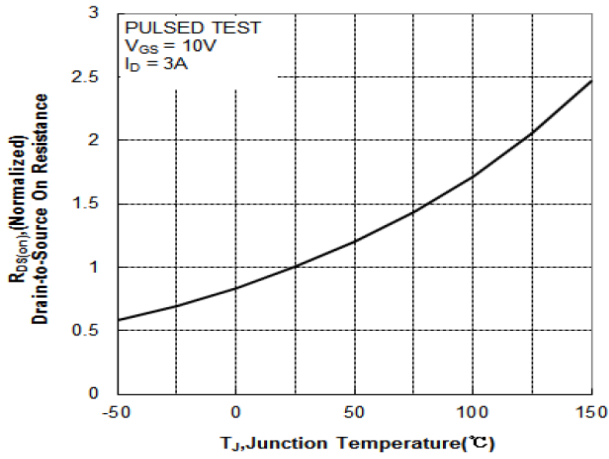

Package Outline Dimensions (Unit: mm)

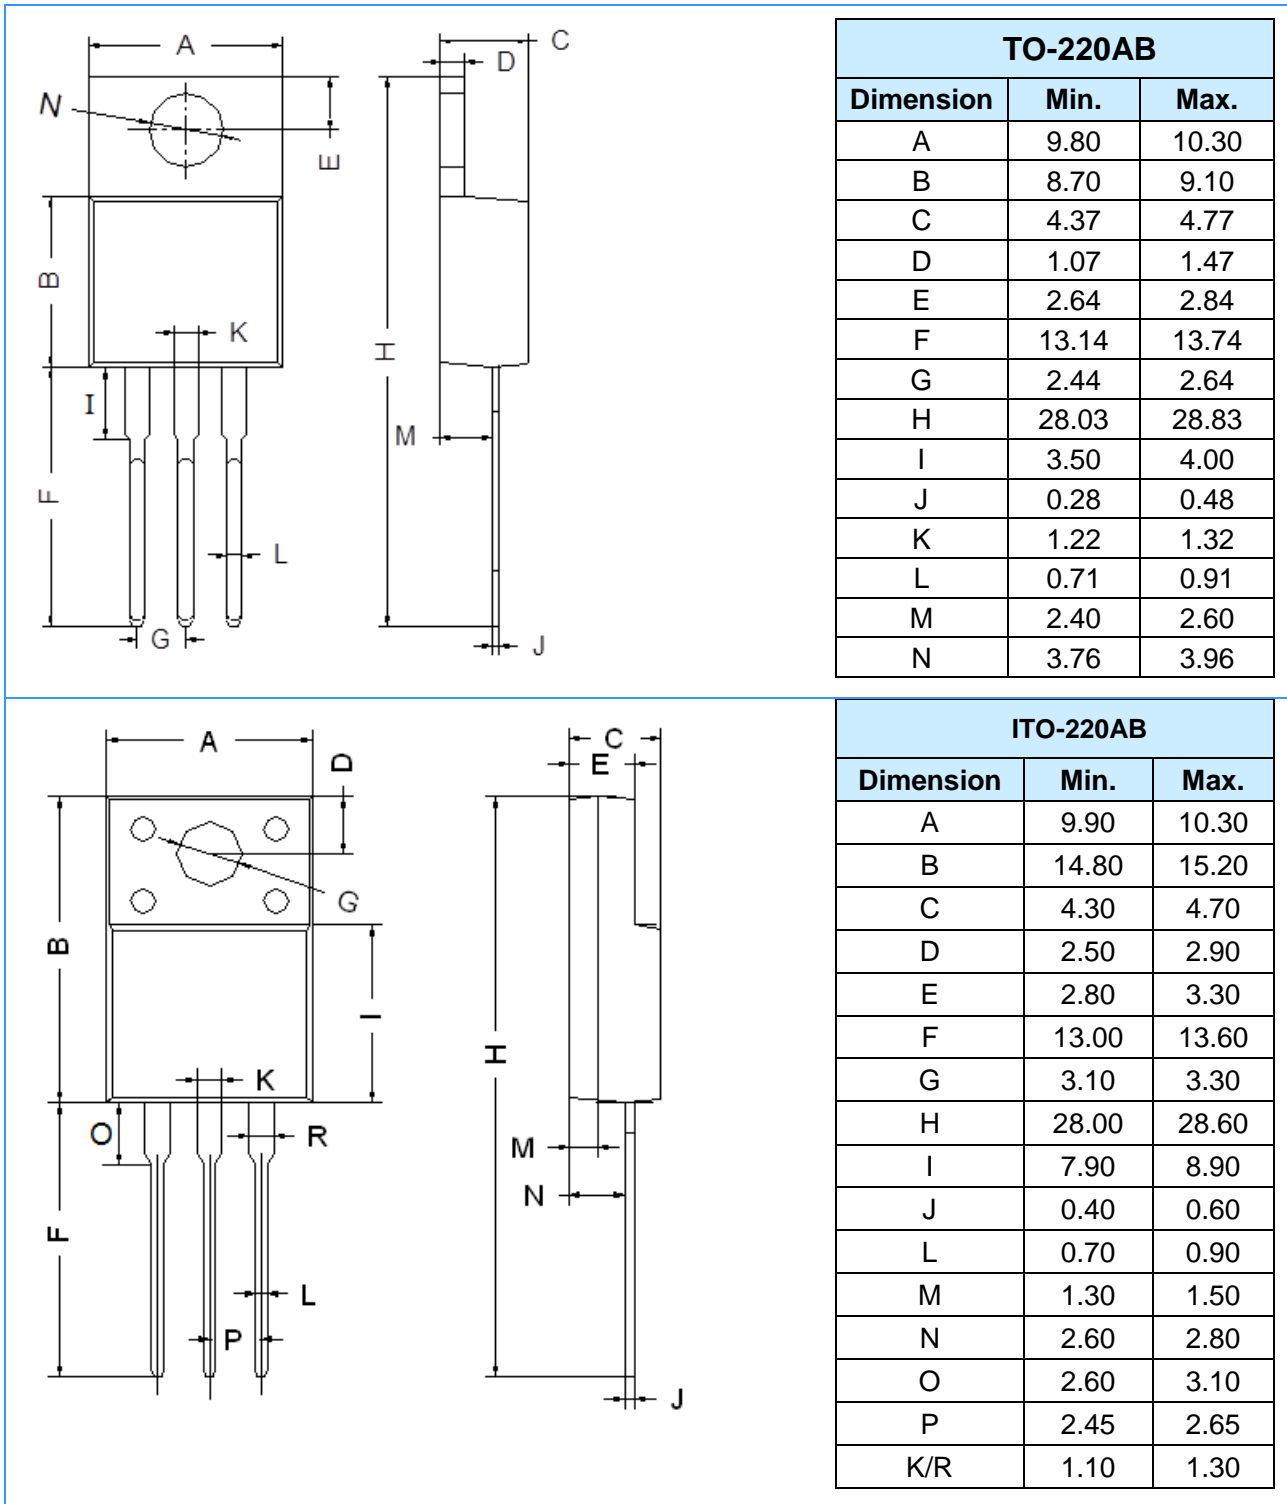

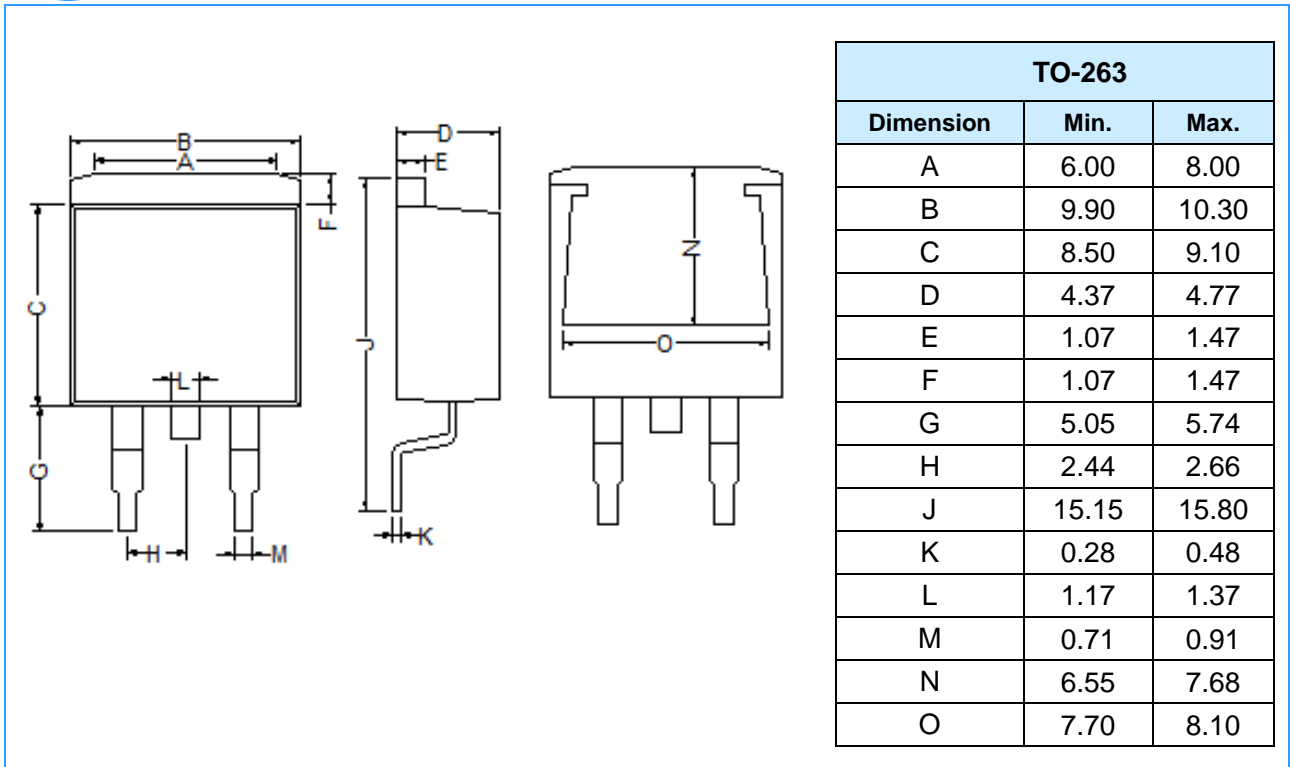

Mounting Pad Layout (Unit: mm)

